

# SealGreen


Concrete Cleaning, Sealing & Staining



A ReUse Concrete Sealing Company



## Gray-Out Waterless Oil Cleaner Application Instructions

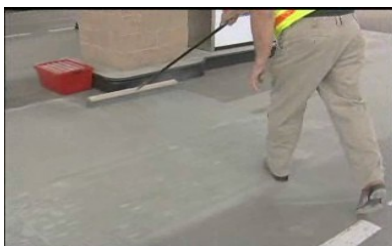

### A. Prepare the area to be cleaned

1. Using a scraper or stiff wire brush to remove heavy buildup, dry layered oil, mud, or chewing gum from the surface of the concrete.
2. Sweep the area to be cleaned; removing all loose soil, debris, litter and dispose of properly.
3. **Do not** use Gray-Out on stained or colored concrete as the gray color will not match. It will not permanently discolor the concrete if you choose to use it on colored concrete.

### B. Applying Gray-Out

1. Apply a line of Gray-Out approximately 16" wide in front of area to be cleaned. The line should be approximately two inches wide **to match the length of your brush**.
2. For proper application on large areas, use a 16" extra fine bristle flagged tip broom to sweep Gray-Out long ways and then sweep again width ways or sideways. Using the crossover sweeping technique will assure excellent coverage into the concrete pores. (*for small areas a broom will also work*). **Be sure to cover the entire area with Gray-Out so that the colors will match.**

### C. Final Check

1. After applying Gray-Out there should be a light residue covering the concrete. If too much product is used, simply remove the extra product by sweeping it up and properly disposing of it, or you can extend the cleaning area by spreading it out across a larger area.

### DO'S AND DON'T'S TO GET EXCELLENT RESULTS



1. **Do** remember that Gray-Out needs time to work which can take several weeks or longer. It will continue working beyond the application time.
2. **Do** remember that Gray-Out DOES NOT work on synthetic oils.
3. **Do not** apply product on a windy or gusty day.
4. **Do not** apply products on wet concrete. Concrete must be dry.
5. **Do not** replace excess product that was on the concrete into the original container. Sweep excess over a larger area or dispose of properly.
6. **Do not over-apply** as this could lead to tracking.

**For More Information And Application Video Visit**  
**[www.Gray-Out.com](http://www.Gray-Out.com) or call 800-997-3873**

SealGreen - ReUse Concrete Sealing Specialists, LLC  
16072 Foster Street, Overland Park, KS. 66085  
[www.SealGreen.com](http://www.SealGreen.com) - 913-681-3451

# SealGreen

Concrete Cleaning, Sealing & Staining



A ReUse Concrete Sealing Company



## Gray-Out Waterless Oil Cleaner Instructions For Small Oil Stains

**Gray-Out Waterless Oil Cleaner** offers an easy way to clean oil stains from your driveway immediately. It is necessary for the concrete to be dry before the application. If the stained area has heavy oil buildup we recommend using a wire brush first to remove the surface oil. This will allow Gray-Out to get into the pores of the concrete to work faster and easier.

The first step is to apply a small amount of the Gray-Out over the area stained with oil. You don't need much, just a little bit. Spread the powder lightly over the stain using the 2-inch brush included with the product. Use just enough to cover the stain so it's not visible. The cleaner will immediately become active upon contact with the oil stain.

The stain looks like it's gone. What is happening? The active agents of the cleaner (enzymes) will work their way into the concrete following the oil and removing not only the surface stain but but the oil inside the concrete as well. Once the cleaner is applied evenly to the area **DO NOT REMOVE IT**. It is a time-driven cleaner and must be allowed to remain on the concrete so it can continue to work.

Many of our customers like to apply the cleaner over the whole section of the concrete to make it look an even color. This may be necessary when the concrete no longer has the new concrete look. Gray-Out is an environmentally safe way to clean oil stains off your concrete.

It is also easy to apply and provides a quick, efficient solution to removing oil, gasoline, diesel, kerosene stains, food oil stains and to improve the look of the concrete immediately. If your stain is not carbon-based oil or grease, please visit our SealGreen website for other great cleaners, rust removers, mold and mildew removers, paint and epoxy removers, mastic removers, and many others. Gray-Out **DOES NOT** work on synthetic oil stains.

### Hints:

- Visit our SealGreen YouTube Channel at [SEALGREENTV](https://www.youtube.com/SealGreenTV).



- When heavy oil is present we usually recommend washing the oil stain with SealGreen Oil Cleaner Degreaser first. This will allow the Gray-Out Waterless Oil cleaner to work faster because it does not have to clean the thick oil on the surface.
- Do not use on colored concrete or colored pavers. It will not permanently discolor the concrete or the pavers but will leave a gray area for a couple of months until it is able to remove itself.
- On small stains use the 2-inch brush included and just lightly dust the stain. More is not better when using Gray-Out. If you apply the Gray-Out to heavily, it could track. If it is applied correctly, it will not track.
- When stains are about a foot square, apply the Gray-Out from the center to the outside of the stain to cover the stain with a thin application. You need just enough to make the oil stain disappear.
- When large amounts of oil need to be cleaned, it may be necessary to re-apply Gray-Out to the stain after some time so it can continue removing the stain out of the concrete
- The time required to clean the oil stain out of the concrete depends on the type of concrete, the amount of oil, the density of the concrete, and the type of oil. It could take up to a couple of months and perhaps will need a second application of Gray-Out.
- For More Information And Application Video Visit—[www.Gray-Out.com](http://www.Gray-Out.com) or call 800-997-3873